1. Description


1.1. Project

Project Name	DigInMiniV00
Board Name	custom
Generated with:	STM32CubeMX 5.6.1
Date	05/31/2020

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103C8Tx
MCU Package	LQFP48
MCU Pin number	48

2. Pinout Configuration

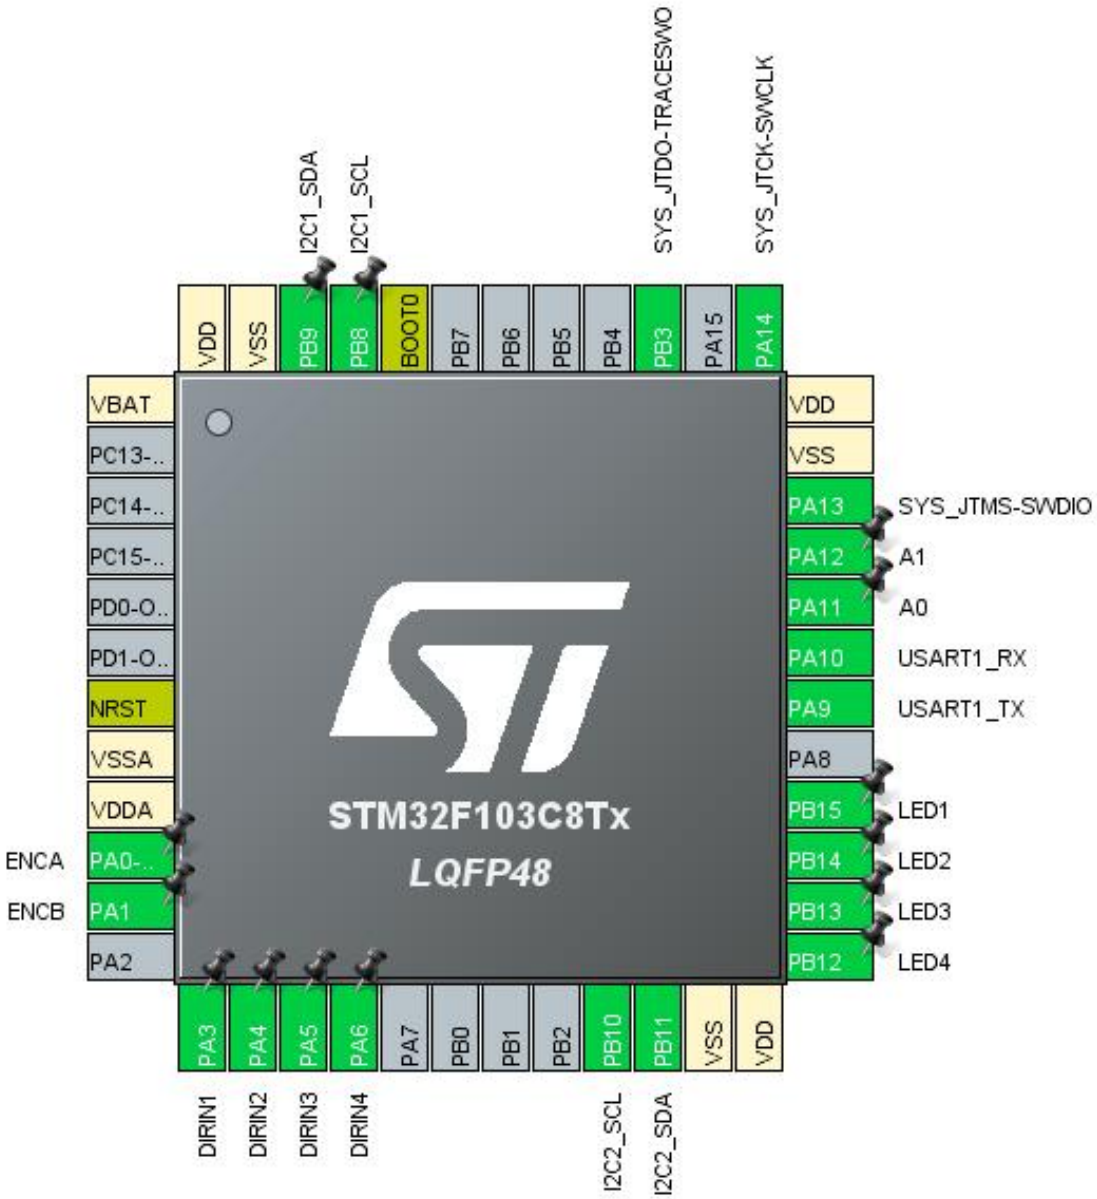


3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
10	PA0-WKUP	I/O	GPIO_EXTI0	ENCA
11	PA1 *	I/O	GPIO_Input	ENCB
13	PA3 *	I/O	GPIO_Input	DIRIN1
14	PA4 *	I/O	GPIO_Input	DIRIN2
15	PA5 *	I/O	GPIO_Input	DIRIN3
16	PA6 *	I/O	GPIO_Input	DIRIN4
21	PB10	I/O	I2C2_SCL	
22	PB11	I/O	I2C2_SDA	
23	VSS	Power		
24	VDD	Power		
25	PB12 *	I/O	GPIO_Output	LED4
26	PB13 *	I/O	GPIO_Output	LED3
27	PB14 *	I/O	GPIO_Output	LED2
28	PB15 *	I/O	GPIO_Output	LED1
30	PA9	I/O	USART1_TX	
31	PA10	I/O	USART1_RX	
32	PA11 *	I/O	GPIO_Output	A0
33	PA12 *	I/O	GPIO_Output	A1
34	PA13	I/O	SYS_JTMS-SWDIO	
35	VSS	Power		
36	VDD	Power		
37	PA14	I/O	SYS_JTCK-SWCLK	
39	PB3	I/O	SYS_JTDO-TRACESWO	
44	BOOT0	Boot		
45	PB8	I/O	I2C1_SCL	
46	PB9	I/O	I2C1_SDA	
47	VSS	Power		
48	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

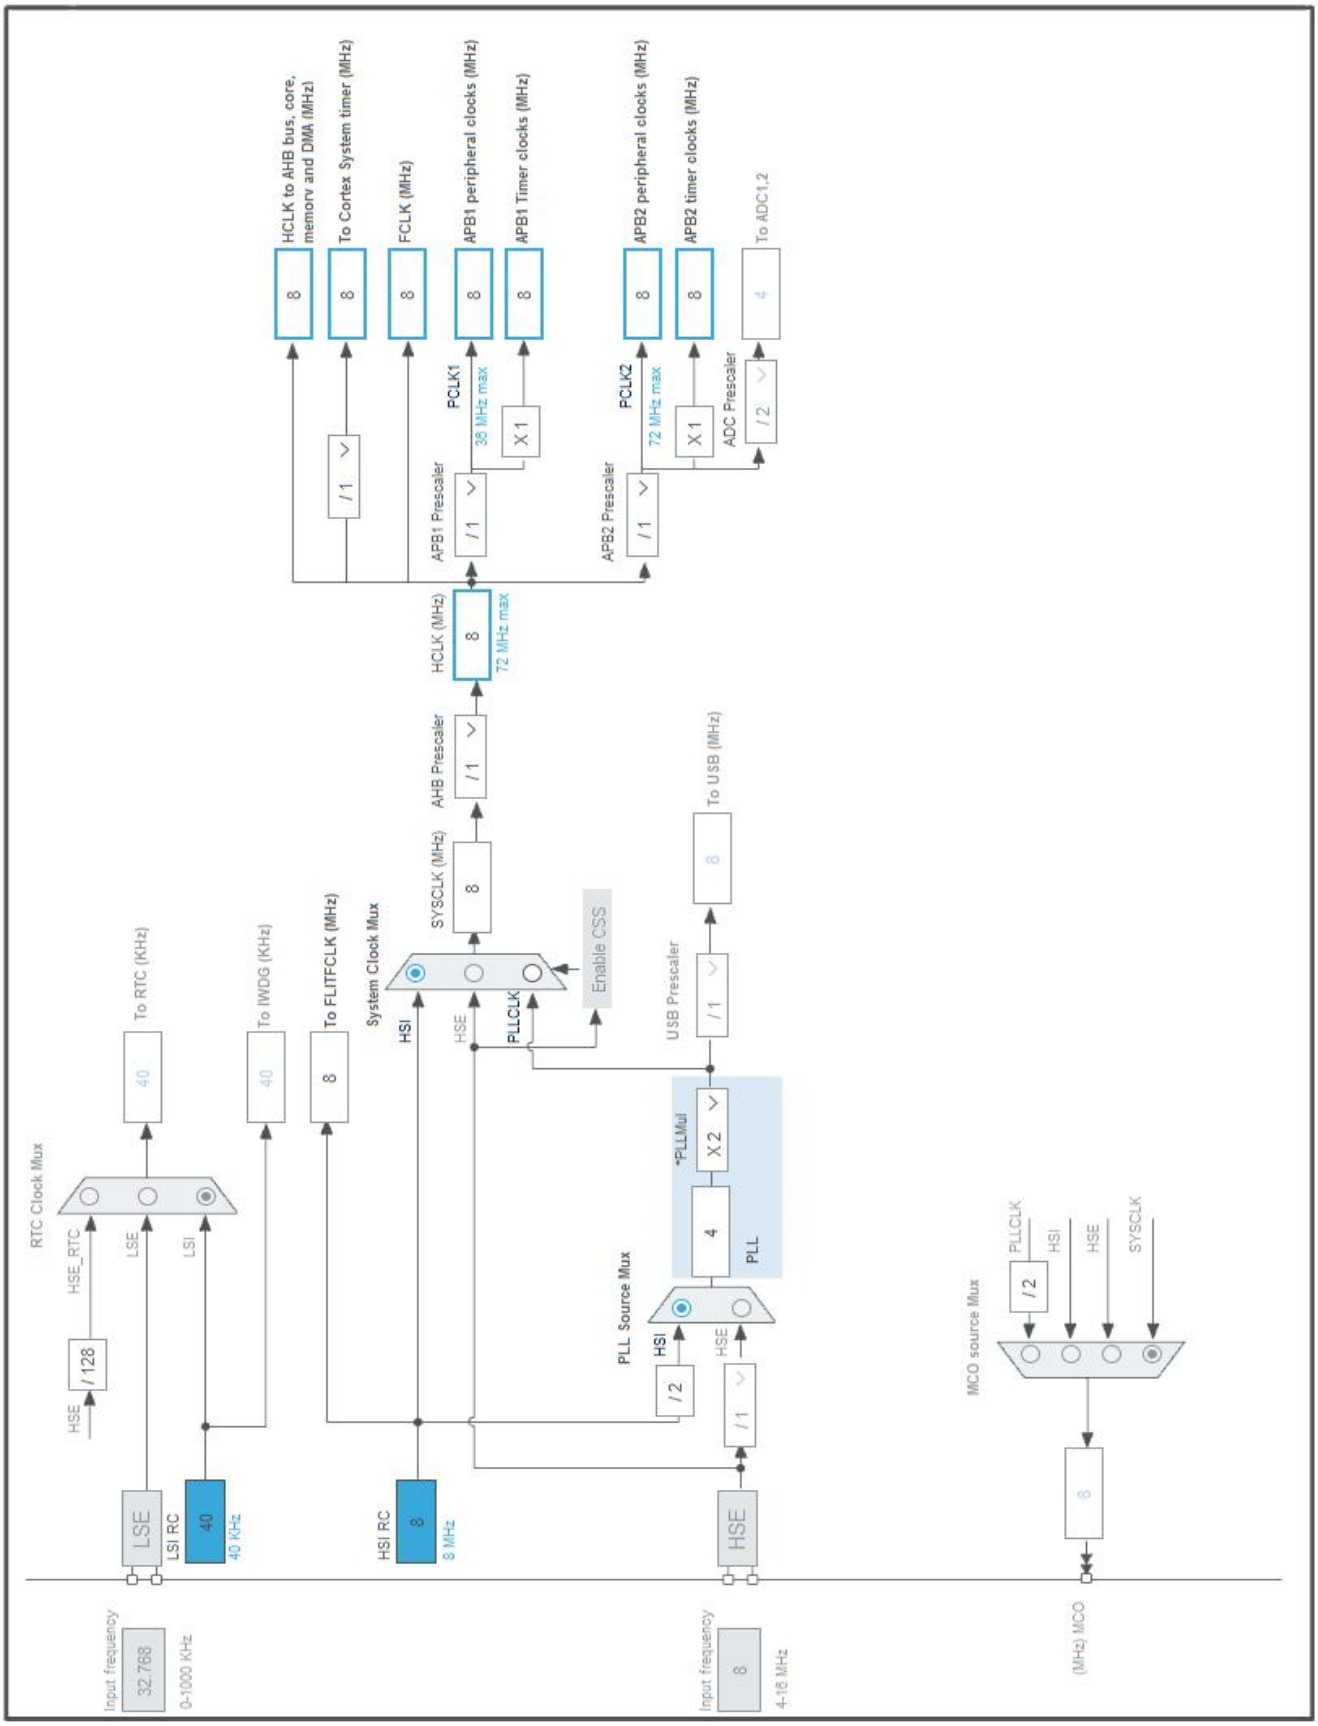

5. Software Project

5.1. Project Settings

Name	Value
Project Name	DigInMiniV00
Project Folder	C:\Users\PCP\Documents\Mis documentos\Code\Digital_Input_Mini\4-
Toolchain / IDE	MDK-ARM V5.27
Firmware Package Name and Version	STM32Cube FW_F1 V1.8.0

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103C8Tx
Datasheet	13587_Rev17

6.2. Parameter Selection

Temperature	25
Vdd	3.3

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	No Scale	No Scale
Fetch Type	FLASH	n/a
CPU Frequency	72 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator_LP
Clock Source Frequency	8 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	27 mA	14 µA
Duration	0.1 ms	0.9 ms
DMIPS	90.0	0.0
Ta Max	100.1	105
Category	In DS Table	In DS Table

6.5. RESULTS

Sequence Time	1 ms	Average Current	2.71 mA
Battery Life	1 month, 21 days, 17 hours	Average DMIPS	61.0 DMIPS

6.6. Chart

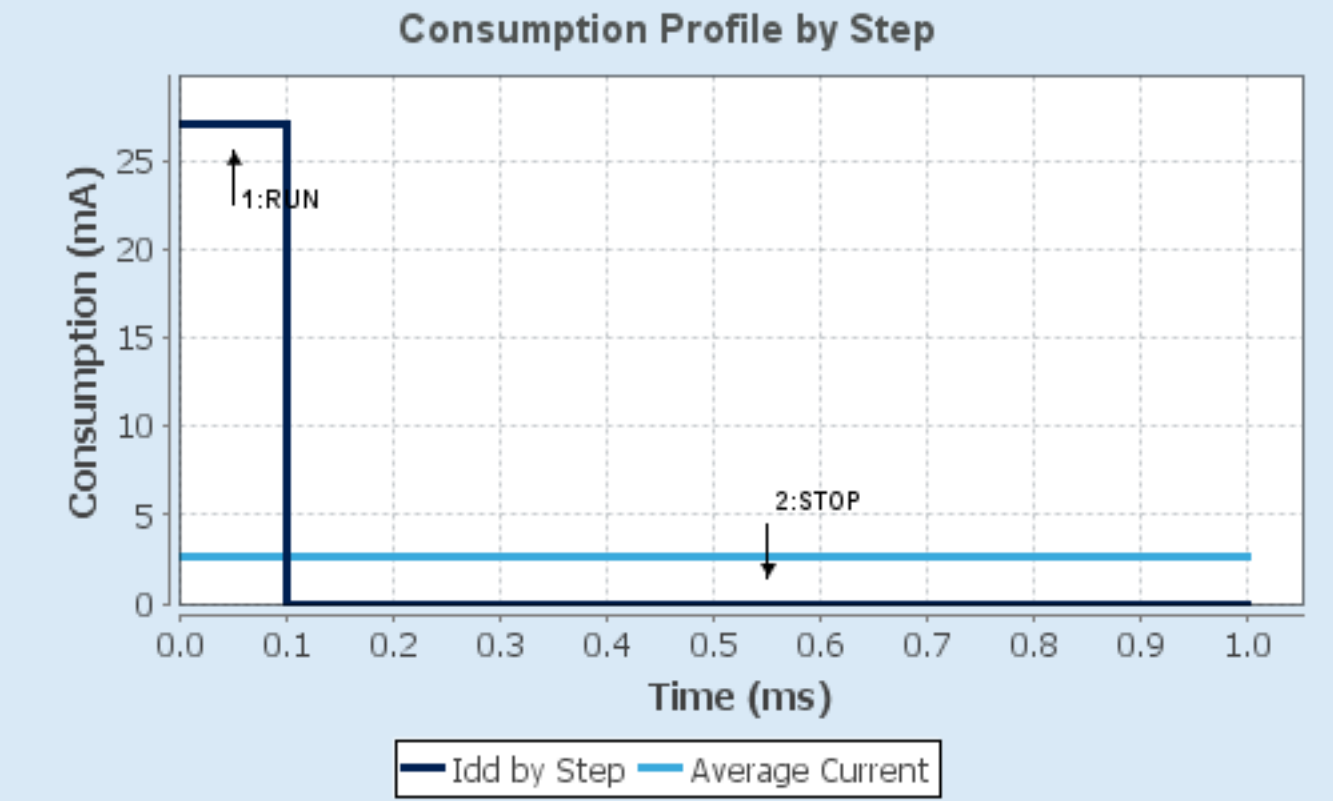
Consumption Profile by Step
Consumption (mA)
25
20
15
10
5
0
1:RUN
2:STOP
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0
Time (ms)
Idd by Step
Average Current

7. IPs and Middleware Configuration

7.1. GPIO

7.2. I2C1

I2C: I2C

7.2.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

7.3. I2C2

I2C: I2C

7.3.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

7.4. RCC

7.4.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	0 WS (1 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

7.5. SYS

Debug: Trace Asynchronous Sw

Timebase Source: SysTick

7.6. USART1

Mode: Asynchronous

7.6.1. Parameter Settings:

Basic Parameters:

Baud Rate	**38400 ***
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB8	I2C1_SCL	Alternate Function Open Drain	n/a	**High ***	
	PB9	I2C1_SDA	Alternate Function Open Drain	n/a	**High ***	
I2C2	PB10	I2C2_SCL	Alternate Function Open Drain	n/a	**High ***	
	PB11	I2C2_SDA	Alternate Function Open Drain	n/a	**High ***	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
	PB3	SYS_JTDO-TRACESWO	n/a	n/a	n/a	
USART1	PA9	USART1_TX	Alternate Function Push Pull	n/a	**High ***	
	PA10	USART1_RX	Input mode	No pull-up and no pull-down	**n/a**	
GPIO	PA0-WKUP	GPIO_EXTI0	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	ENCA
	PA1	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	ENCB
	PA3	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	DIRIN1
	PA4	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	DIRIN2
	PA5	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	DIRIN3
	PA6	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	DIRIN4
	PB12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED4
	PB13	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED3
	PB14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED2
	PB15	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED1
	PA11	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	A0
	PA12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	A1

8.2. DMA configuration

DMA request	Stream	Direction	Priority
USART1_RX	DMA1_Channel5	Peripheral To Memory	Low
USART1_TX	DMA1_Channel4	Memory To Peripheral	Low

USART1_RX: DMA1_Channel5 DMA request Settings:

Mode:	**Circular ***
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

USART1_TX: DMA1_Channel4 DMA request Settings:


Mode:	Normal
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
EXTI line0 interrupt	true	0	0
DMA1 channel4 global interrupt	true	0	0
DMA1 channel5 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
I2C2 event interrupt	unused		
I2C2 error interrupt	unused		
USART1 global interrupt	unused		

*** User modified value**

9. Predefined Views - Category view : Current

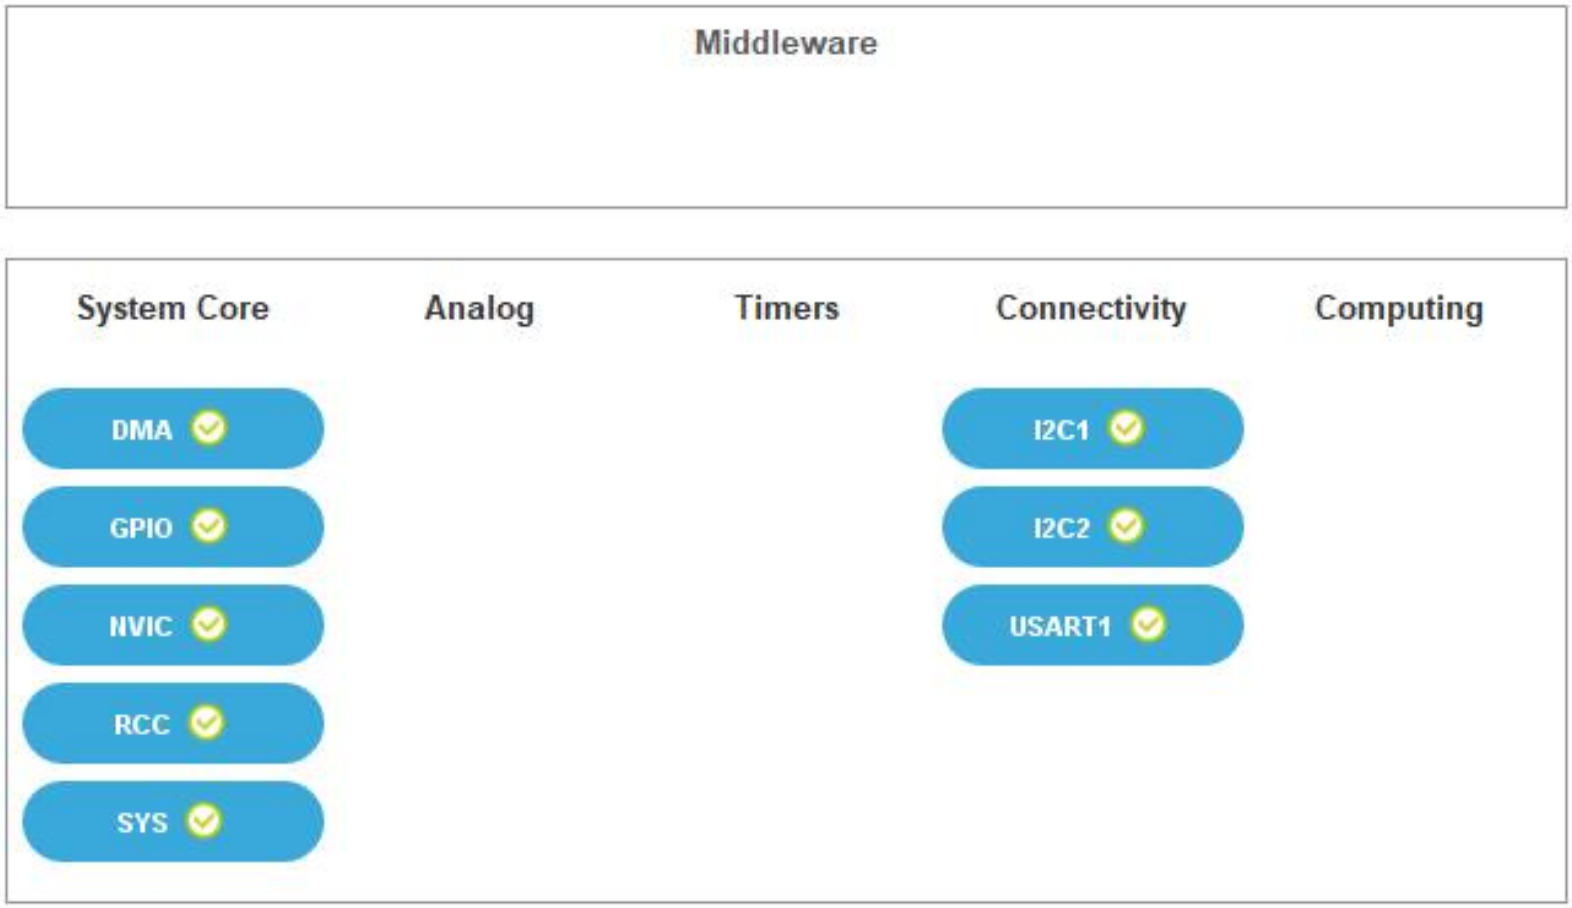

10. Software Pack Report